

Rack Mount Power Supply PC1U-160P Series

Cost-Oriented 1U Size PC Power Supply



**RoHS
Directive**

1U
Continuous Max. **120W** Peak Power **160W**

PC1U-160P-X2S

Model	Description	Stock
PC1U-160P-X2S	_____	Standard stock
PC1U-160P-X2S-02	With output harness	Standard stock

Model Name Coding
PC1U - 160 P - X 2 S - *
 ① ② ③ ④ ⑤ ⑥ ⑦

1. Series name
 2. Output power
 3. Peak output compliant
 4. ATX output
 5. +3.3V output equipped
 6. Standard
 7. -: No output harness
 02: With output harness

Features

- 40.5mm in height compliant to 1U rack servers.
- Cost-oriented power supply remaining the functions of PC1U-210P-X2S as it is.
- Mag. Amp. constant voltage control for +12V output.
- Slow speed of fan even at standby mode to reduce the heat of +5VSB.
- Output harnesses can be easily customized to meet various requirements.
- Double-sided through hole PCB suitable for industrial use.

Introduction of modified products

With Fan signal output equipped

■Model: PC1U-145P-X2H

■Output

Output voltage	+3.3V	+5V	+12V	-12V	+5VSB
Max. current/ max. power (continuous)	7A Total 70W	12.5A Total 114W	6A Total 125W	0.3A	1.5A
Peak current/ peak power (5 sec max.)	10A Total 101W	15.5A Total 145W	8A	0.3A	2.5A
Min. current	0A	1.5A	0.1A	0A	0A

■Dimension

W×H×D (mm): 100×40.5×198

*Min. lot is 50 pcs: Lead time 100days

Please ask for detail

Refer to "Product Page Guideline" on p.13

Safety standard / Approval	UL	CSA	EN	CE	CCC
Reliability Grade	HFA	FA	HOA	OA	

Function

DC start	RS 232C	USB	TTL	PFC	Silence	5VSB FAN	T5FC FAN	Connection	RoHS
----------	---------	-----	-----	-----	---------	----------	----------	------------	------

Input

AC input	85 - 264V (worldwide range)
----------	-----------------------------

Output

Output voltage	+3.3V	+5V	+12V	-12V	+5VSB
Max. current / max. power (continuous)	7A Total 70W	10A Total 110W	6A Total 120W	0.8A	1.5A
Peak current / peak power (5 sec max.)	10A Total 20A / 100W	20A Total 145W	7A Total 160W	0.8A	2.5A
Min. current	0A	1.5A	0A	0A	0A

Dimensions

W×H×D (mm)	100×40.5×190 (1U size)
------------	------------------------

Output connector


PC1U-160P-X2S (optional component)											
Main 20+4pin	Main 24pin	Main 20pin	AT	AUX	12V 4pin	12V 8pin	PCI-E 6pin	PCI-E 6+2pin	HDD	S-ATA	FDD
Refer to p.337 "Detachable Output Harness" for details											
PC1U-160P-X2S-02											
Main 20+4pin	Main 24pin	Main 20pin	AT	AUX	12V 4pin	12V 8pin	PCI-E 6pin	PCI-E 6+2pin	HDD	S-ATA	FDD

General Specification Condition: at normal temperature and humidity unless otherwise specified

Items		Specification					Measurement conditions, etc.
AC Input	Rated Voltage	100 - 240 VAC (85 - 264 VAC)					Worldwide range
	Input Frequency	50 / 60Hz					47 - 63Hz
	Efficiency	67% typ. (100 VAC), 70% typ. (240 VAC) *Characteristic data: Fig.2					At rated input/output
	Power Factor	98% typ. (100 VAC), 92% typ. (240 VAC) *Characteristic data: Fig.3					
	Inrush Current	50A peak (100 VAC), 100A peak (240 VAC) *Characteristic data: Fig.4					At rated input/output at cold start (25°C)
	Input VA	250VA max. *Characteristic data: Fig.3					At rated input /output
Output	Rated Voltage	+3.3V	+5V	+12V	-12V	+5VSB	
	Rated Current	7A	10A	6A	0.8A	1.5A	
	Max. Current / Power	7A	10A	6A	0.8A	1.5A	Max. output power: 120W
		70W max.					
		110W max.					
	Peak Current / Power	10A	20A	7A	0.8A	2.5A	Peak output power: 160W Time: 5 sec or less Duty ratio of repetitive load: 10% or less *Refer to Fig.1
		20A / 100W max.					
		145W max.					
			160W max.				
	Min. Current	0A	1.5A	0A	0A	0A	
Total Voltage Accuracy (%)	±5 max.	±5 max.	±5 max.	±5 max.	±5 max.	Total accuracy of temperature, input, and load fluctuations	
Max. Ripple Voltage (mVp-p)	50 max.	50 max.	120 max.	150 max.	50 max.	Two wires are coming out from the output connector and connected into one at the edge of 50cm max. long. 10μF electrolytic capacitor and 0.1μF film capacitor are placed on it and it is measured by the 20MHz oscilloscope. *Characteristic data: Fig.15	
Max. Spike Voltage (mVp-p)	100 max.	100 max.	170 max.	200 max.	100 max.		
Protection	Overcurrent Protection	OCP Point (A)	12 min.	22 min.	7.7 min.	Short protection	
		Method	All outputs shutdown except for +5VSB			Fold back current limiting	All outputs shutdown
		Recovery	Reclosing AC input (5 sec min. interval)			Automatic recovery	
	Overvoltage Protection	OVP Point (V)	3.8 - 4.3	6.0 - 7.0	14 - 15.6	-	-
Method		All outputs shutdown except for +5VSB			-	-	
Recovery		Reclosing AC input (5 sec min. interval)			-	-	
Environment/Insulation	Operating Temp. / Humidity	0 to 50°C / 10 to 90%					No condensation
	Storage Temp. / Humidity	-25 to 70°C / 10 to 95%					No condensation
	Vibration	Displacement amplitude: 0.15mm (10-55Hz), Sweep cycles: 10, Test duration: 45 minutes each axis					JIS-C-0040-1999
	Mechanical Shock	Lift one bottom edge up to 50mm and let it fall. Number of bumps: 3 each of 4 edges					JIS-C-0040-1995
Insulation	Dielectric Strength	AC input - DC output/FG: 1500 VAC for 1 minute					Cut-off current: 10mA (Humidity: 60% max.)
	Insulation Resistance	AC input - DC output/FG: 50MΩ min.					At 500 VDC (Humidity: 60% max.)
	Leakage Current	0.5mA max. (100 VAC) / 1mA max. (240 VAC) *Characteristic data: Fig. 5					YEW. TYPE3226 (1kΩ) or equivalent
	Line Noise Immunity	±2000V (pulse width: 100/800ns, repetitive cycle: 10-50ms)					No malfunction
EMC	Electrostatic Discharge	EN61000-4-2 compliant					
	Radiated, Radio-Frequency EM Field	EN61000-4-3 compliant					
	Fast Transient Burst	EN61000-4-4 compliant					
	Lightning Surge	EN61000-4-5 compliant					
	RF Conducted Immunity	EN61000-4-6 compliant					
	Magnetic Field Immunity	EN61000-4-8 compliant					
	Voltage Dip / Regulation	EN61000-4-11 compliant					
	Conducted Emission	VCCI-B compliant *Characteristic data: Fig.6 and 7					
	Harmonic Current Regulation	IEC61000-3-2 Class A, EN61000-3-2 Class A compliant					At rated input/output
	Safety Standard	UL60950-1, CSA C22.2 No. 60950-1 (c-UL)					
Others	Cooling System	Forced air cooling					At PS_ON# 'H', fan rotates at low speed
	Output Grounding	Capacitor grounding					
	Output Hold-up Time	PWR_OK holds up 20ms min. after AC failure. *Characteristic data: Fig.12					At rated output
	Reliability Grade	FA (industrial equipment grade, double-sided through hole PCB)					Follow our standard
	MTBF	80,000H min.					Based on EIAJ RCR-9102
	Weight	0.9kg typ. (PC1U-160P-X2S) / 1.1kg typ. (PC1U-160P-X2S-02)					
	Warranty	3 years after delivery. If any faults belong to us, the defective unit shall be repaired or replaced at our cost.					Except for errors caused by operation not listed

Fig.1 Duty Ratio


Peak current/power shall be 5 sec or less continuously.
For repetitive loads, duty ratio shall be 10% or less.



Signal Input / Output Specification Condition: at normal temperature and humidity unless otherwise specified

	Items	Specification	Note
Input Signal	Output ON / OFF Control Signal (PS_ON#)	+3.3V, +5V, +12V, and -12V outputs shutdown with 'H' or 'OPEN' input	Signal input between the pin 14 of Output1(MAIN) connector and COM pin
	+3.3V SENSE	The input terminal to detect the voltage of +3.3V output; by connecting to the load terminal, only the line drop of the + side of the output cable is compensated.	The pin 11 of Output1(MAIN) connector
Output Signal	Normal Output Signal (PWR_OK)	'H' signal is delivered when the +5V output is normal (detection delay time: 100 - 500ms).	The pin 8 of Output1(MAIN) connector

Signal Circuit


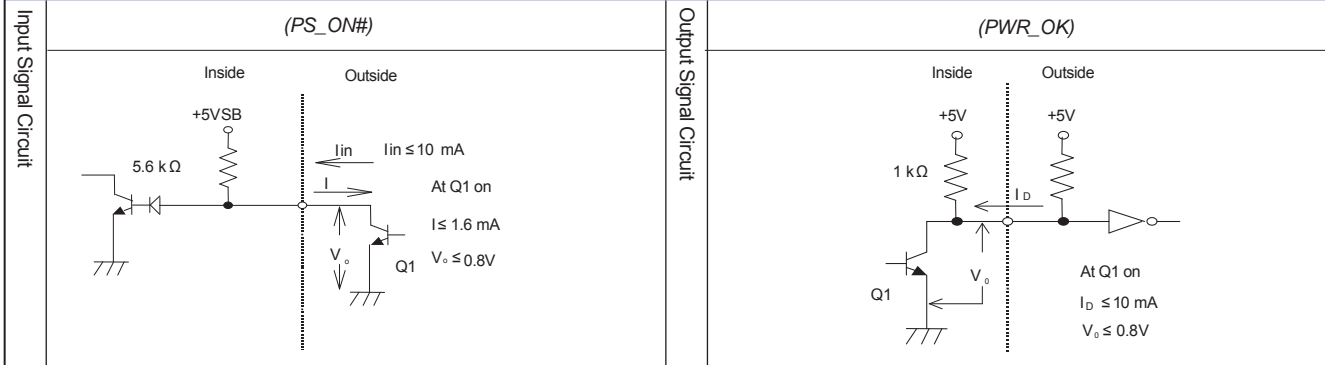


BRAIN Power Supply


Rack Mount Power Supply

Non-backup Power Supply

Internal Structure

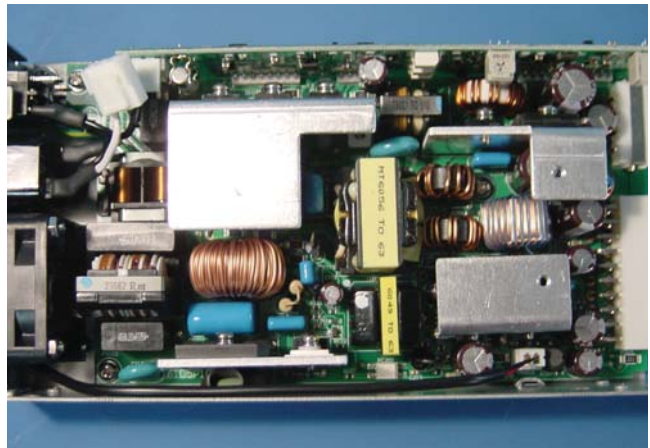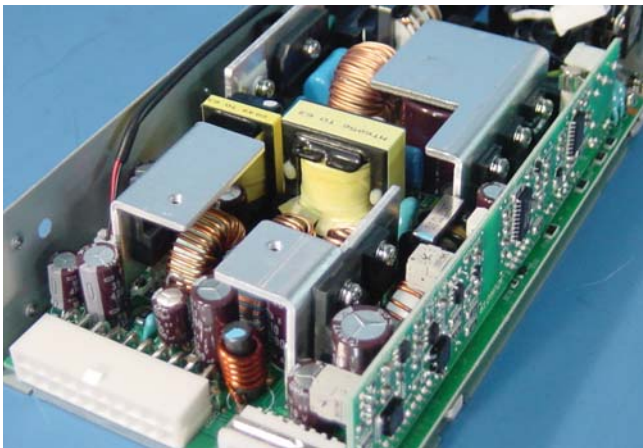

Sequence Diagram

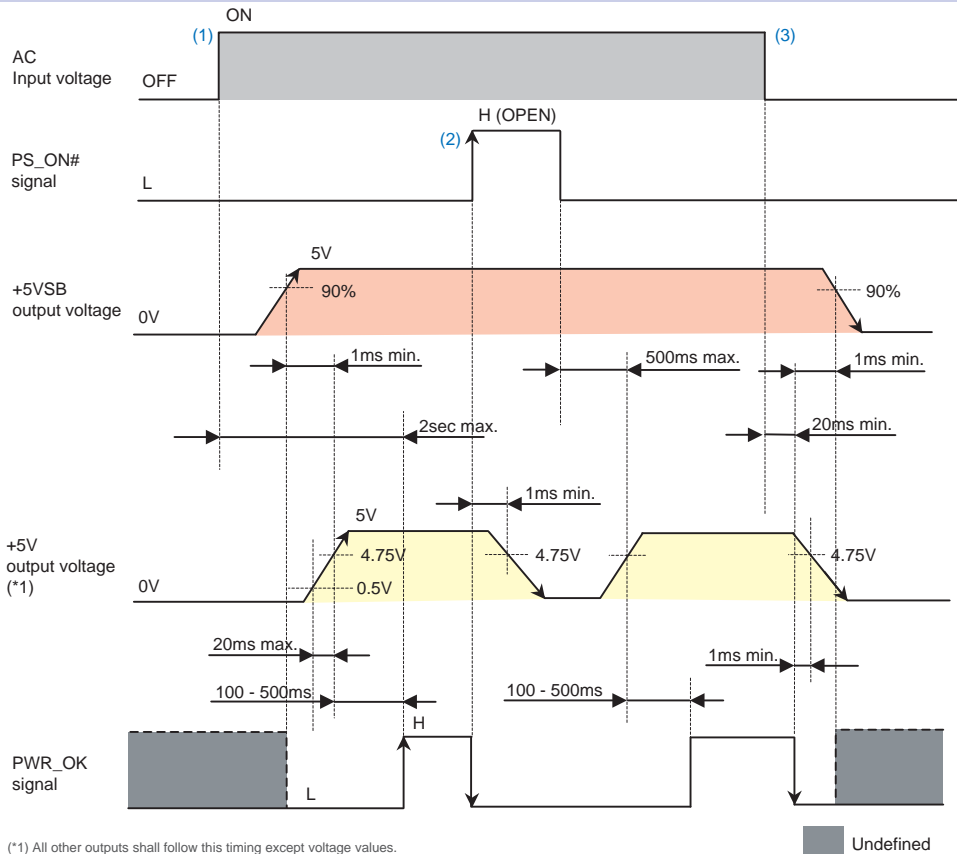


(*1) All other outputs shall follow this timing except voltage values.

(1) All outputs start up by being supplied AC input under the condition of PS_ON# 'L'. PWR_OK 'H' is delivered at 100 - 500ms after +5V output has risen.

(2) At PS_ON# 'H (OPEN)' input, outputs except for +5VSB shut down.


(3) PWR_OK turns to 'L' after 20ms or longer from blackout. 1ms later than this event, the all outputs including +5VSB shuts down.

Block Diagram

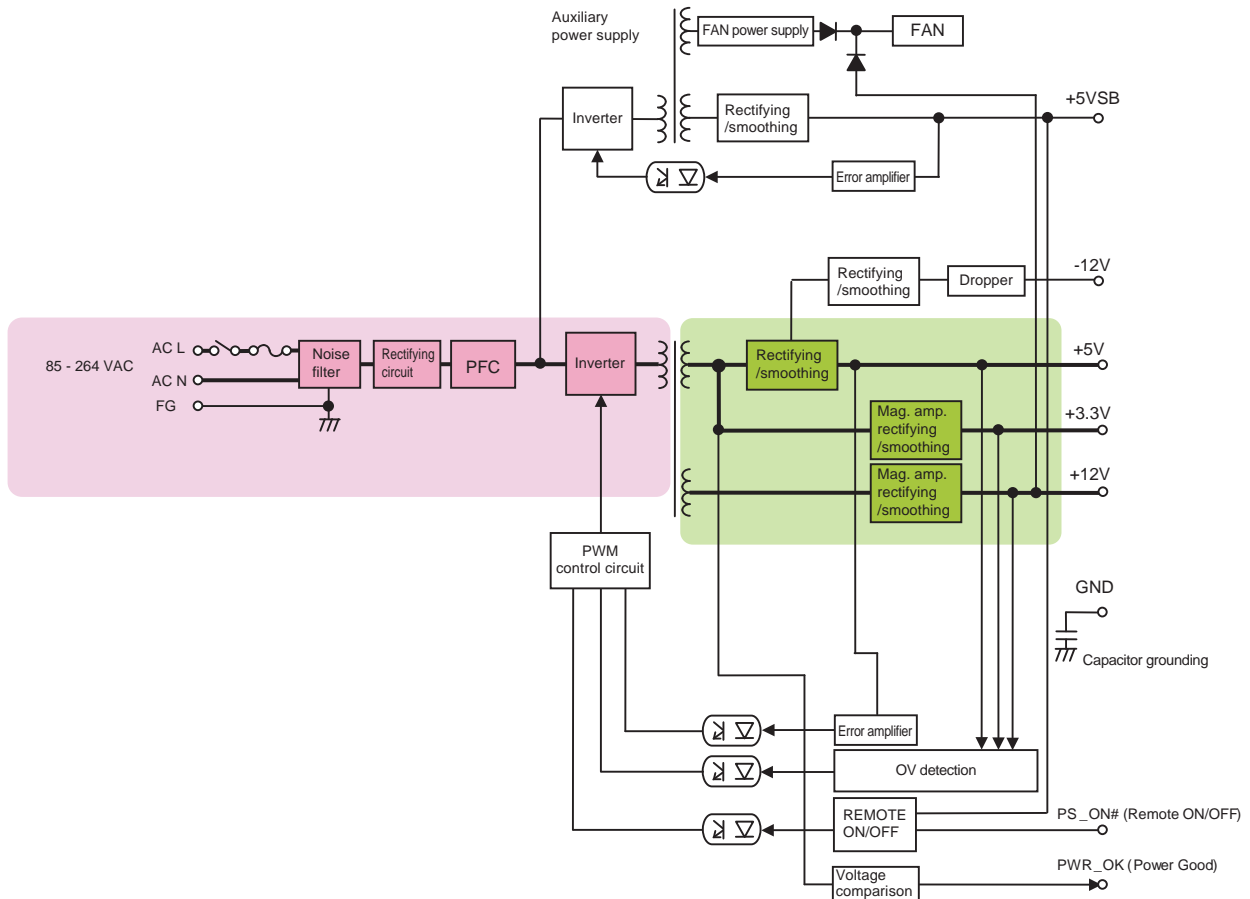


Outline Drawing

Pin	Signal	Rating	Pin	Signal	Rating
1	+3.3 V DC	6 A	11	+3.3 V sense	-
2	+3.3 V DC	6 A	12	-12 V DC	0.8 A
3	COM	6 A	13	COM	6 A
4	+5 V DC	6 A	14	PS-ON#	10 mA
5	COM	6 A	15	COM	6 A
6	+5 V DC	6 A	16	COM	6 A
7	COM	6 A	17	COM	6 A
8	PWR_OK	10 mA	18	-5 V DC	0.3 A
9	+5 VSB	15 A	19	+5 V DC	6 A
10	+12 V DC	6 A	20	+5 V DC	6 A

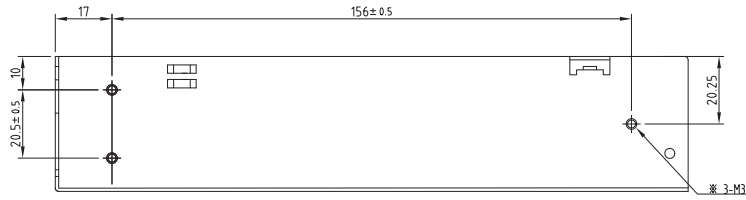


OUTPUT 1
5569-20A2-210(MOLEX)
or Equivalent

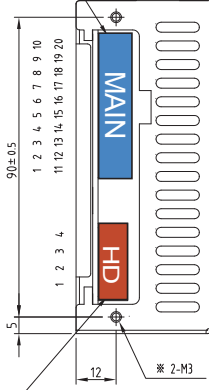


OUTPUT 2
LC-04A(JST)
or Equivalent

Pin	Signal	Rating
1	+12 V DC	7 A
2	COM	7 A
3	COM	7 A
4	+5 V DC	7 A

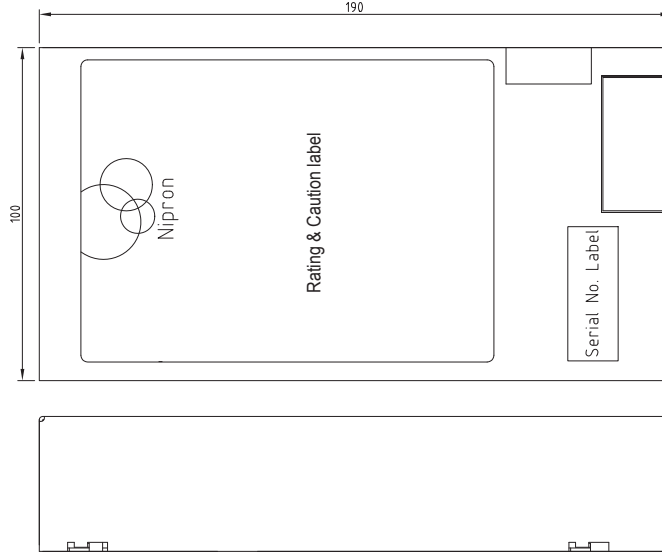

FAN BLOW
➔

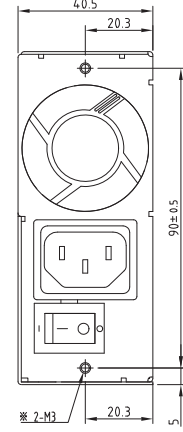

※ Mounting Hole
The length of mounting screws inside of power supply should be less than 4.5mm

Dimensional tolerance shall be ± 1 unless otherwise specified.

Note) Total power of each output is prescribed by specifications.

■ Installation direction
The unit can be installed in any directions.



Optional Components Sold Separately

Detachable Output Harness

Model	Length and Type of Connector	Output Port Allocation
Main power cable MAIN		
WH-M2420-400	400±15 → 24-pin	
WH-M2020-400	400±15 → 20-pin	
WH-M2020-192	192±15 → 20-pin	
WH-MAT20-400	400±15 → AT for +3.3V	
HD power cable HD		
WH-PV404-600	300±20 → 150±10 peripheral (HD) → 150±10 FD	
	300±20 → +12V 4-pin	

*PC1U-160P-X2S-02 comes with WH-M2020-400 and WH-PV404-600 in each.

Optional Components sold Separately

Cable			
Picture	Model	Type	Description
	WH2753	AC power cord	125 VAC 12A [PSE]
	WH2753-02	AC power cord	125 VAC 12A (tracking resistance type) [PSE]

Other Optional Components			
Model	Description	Model	Description
ACC2637	Automatic startup unit	WH5105	12V 4-pin connector conversion harness (80mm)
WH2820	20-pin extension harness (600mm)	WH5105-02	12V 4-pin connector conversion harness (320mm)
WH2747	20-pin extension harness (450mm)	WH5055	AT connector conversion harness
WH2892-02	20-pin extension harness (200mm)	ACC5046	Harness with PS_ON switch
WH2812	PCI-E 6-pin connector conversion harness	ACC5077	PS_ON terminal short connector
		WH5073	PS_ON terminal short 20-pin harness


BRAIN
Power
Supply

Rack Mount Power Supply


Non-backup Power Supply

Characteristics Data (Examples of actual measurement)


• Fig.2 Efficiency / Input Current vs. Output Power

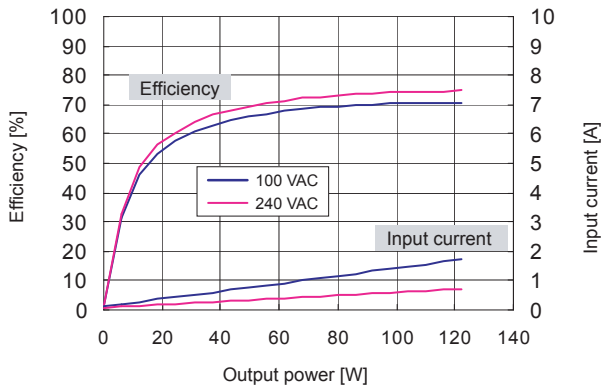

• Fig.3 Power Factor / Input VA vs. Output Power

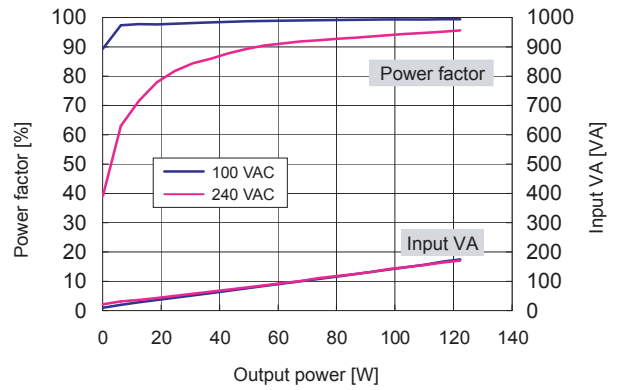

• Fig.4 Inrush Current

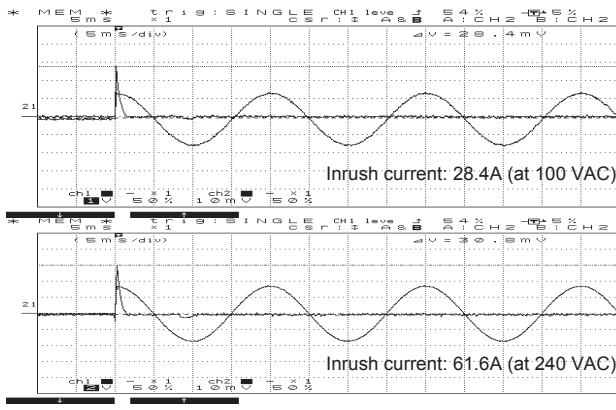



• Fig.5 Leakage Current

Input: 100 / 240 VAC
Load: Rated and min. load

	Rated load	Min. load
100 VAC	0.29mA	0.27mA
240 VAC	0.64mA	0.66mA



• Fig.6 Conducted Emission at 100 VAC

Input: 100 VAC
Load: Rated
Mode: Peak

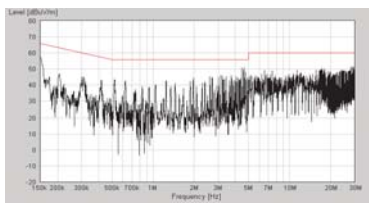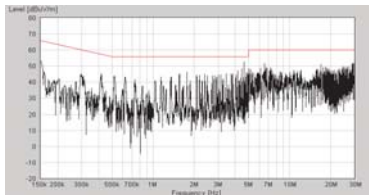


• Fig.7 Conducted Emission at 240 VAC

Input: 240 VAC
Load: Rated
Mode: Peak

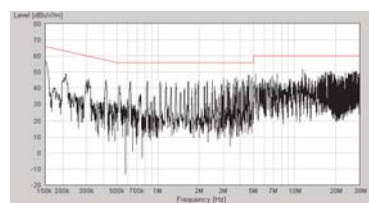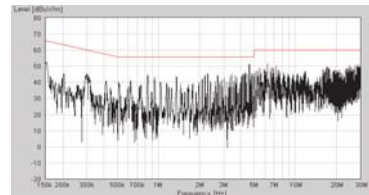


• Fig.8 Rising Characteristics at 100 VAC

Input: 100 VAC
Load: Rated
Time axis: 1ms/DIV

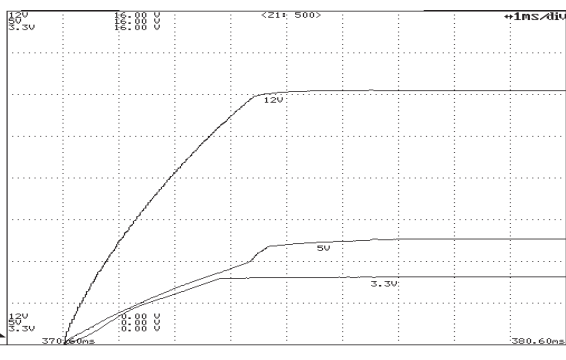


• Fig.9 Falling Characteristics at 100 VAC when REMOTE goes Off

Input: 100 VAC
Load: Rated
Time axis: 10ms/DIV

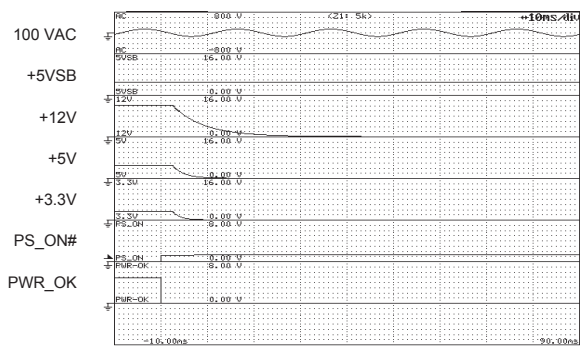


Characteristics Data (Examples of actual measurement)


● Fig.10 Rising Characteristics at 240 VAC

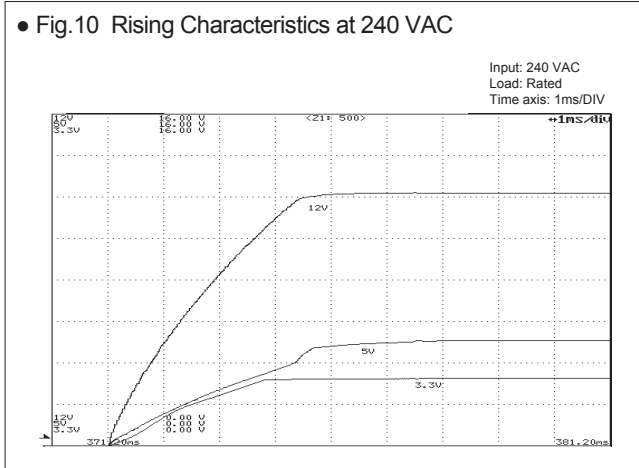


● Fig.11 Falling Characteristics at 240 VAC when REMOTE goes Off

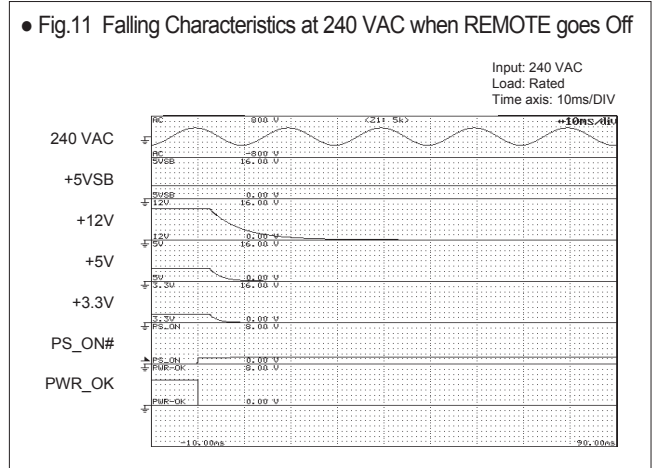

● Fig.12 Output Hold-up Time vs. Output Power

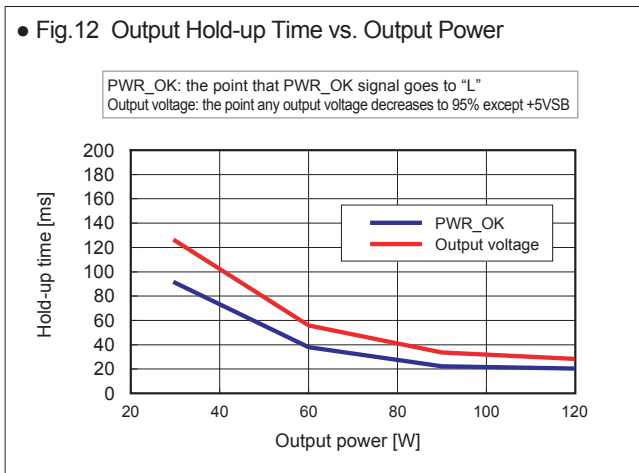

● Fig.13 Dynamic Load Fluctuation Characteristics at 1kHz

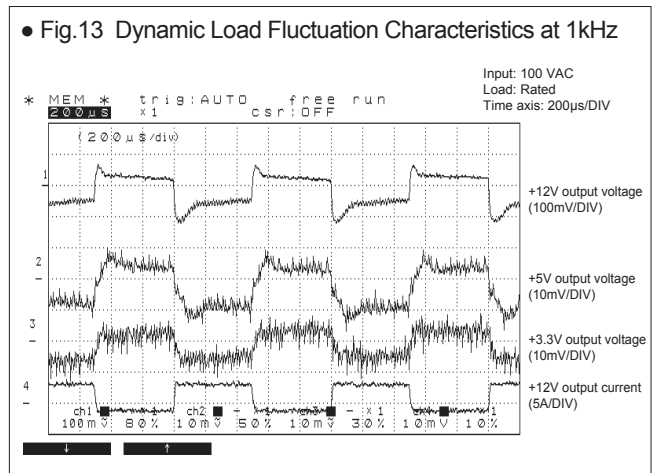


● Fig.14 Output Voltage Regulation

Output	Min. load	Rated load	Peak load
+12V output	0A	6A	7A
+5V output	1.5A	10A	20A
+3.3V output	0A	7A	10A

AC input voltage	85 VAC	100 VAC	132 VAC	176 VAC	240 VAC	264 VAC
+12V output (min. load)	12.313 V	12.314 V	12.314 V	12.314 V	12.314 V	12.314 V
+12V output (rated load)	12.246 V	12.245 V	12.246 V	12.245 V	12.246 V	12.246 V
+12V output (peak load)	12.213 V	12.214 V	12.213 V	12.213 V	12.213 V	12.213 V
+5V output (min. load)	5.169 V	5.169 V	5.169 V	5.169 V	5.169 V	5.169 V
+5V output (rated load)	5.110 V	5.110 V	5.110 V	5.110 V	5.110 V	5.110 V
+5V output (peak load)	5.029 V	5.029 V	5.029 V	5.029 V	5.029 V	5.029 V
+3.3V output (min. load)	3.340 V	3.340 V	3.340 V	3.340 V	3.340 V	3.340 V
+3.3V output (rated load)	3.280 V	3.280 V	3.280 V	3.280 V	3.280 V	3.280 V
+3.3V output (peak load)	3.232 V	3.232 V	3.232 V	3.232 V	3.232 V	3.232 V

● Fig.15 Ripple and Spike Voltage

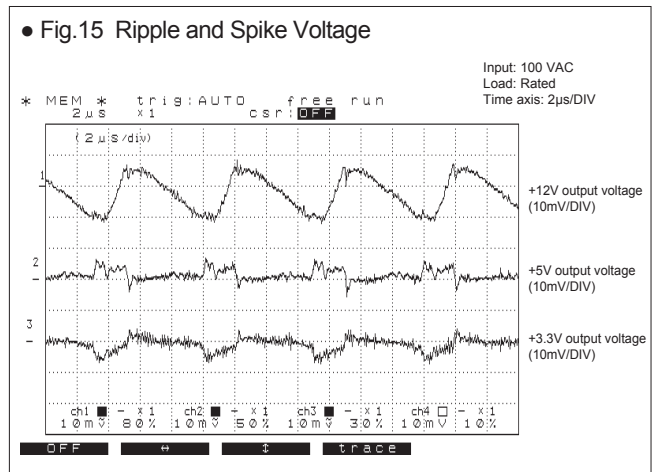

● Fig.16 Ambient Temperature vs. Expected Service Life

■ Electrolytic capacitors

Input: 85 VAC
Load: Rated
Operating time: 24 consecutive hours

Intake air temp.	20°C	30°C	40°C	50°C
Expected service life (yr)	approx. 52	approx. 26	approx. 13	approx. 6.5

※ Lifetime shall be 15 years at longest due to deterioration of sealing plates.

■ Fan

Ambient temp.	20°C	30°C	40°C	50°C
Expected service life (yr)	approx. 14	approx. 9.4	approx. 6.5	approx. 4.5

● Fig.17 Over Current Protection (V-I Characteristic)

